

Transporters  
HF-2



**HAPERT INDIGO**  
TRANSPORTERS

**BRING  
IT ON.**

# INDIGO HF: VERSATILE AND PRACTICAL IN USE

The Indigo HF is suitable for the transportation of a wide range of equipment, cars, and other vehicles.


This complete transporter is available in 4 sizes. As a standard, the Indigo HF has been equipped with a durable plywood floor plate, the unique Combi Protect Rail (with a height of 80 mm) on the side and front walls, 2 aluminium loading skids with a length of 2500 mm, integrated underneath the floor, tyres 195/50 R13, and an adjustable winch and winch support mounted in front. This model will perfectly meet even the heaviest of transportation needs; the Indigo HF can be provided with a gross loading capacity of 2700, 3000, or even 3500 kg!

**BRING  
IT ON.**





# STANDARDS, OPTIONS, AND ACCESSORIES

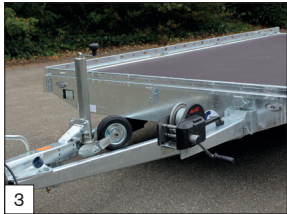


**Standard:** a robust, adjustable winch with support in front.




**Standard:** a bolted V-drawbar and a heavy duty jockey wheel assembled.



**Standard:** with TÜV certified load securing system.

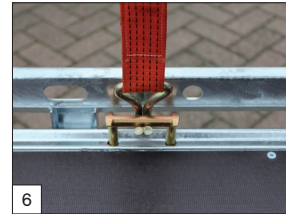

**Standard:** the fixing points have a capacity of 1000 daN (kg.) each.

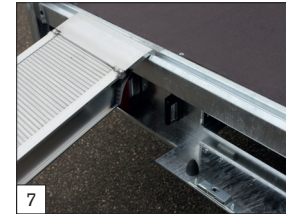

**Standard:** U-profil at the rear for placing the loading skids hinged.




**Standard:** adjustable wheel chock (model Combi Protect Rail).




**Standard:** aluminium loading skids in 2500mm long.



**Option:** parabolic axles incl. shock absorbers are possible for all Indigo HF models in 3500kg. Tyres 195/50 R13 are with black rims.

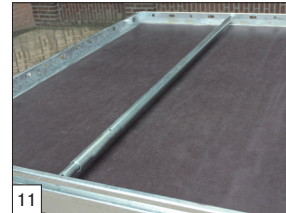

**Option:** adjustable wheel chock model Combi Protect Rail.

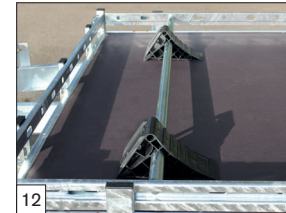

**Option:** adjustable wheel chock model Combi Protect Rail and 2 black wheel chocks.



**Standard:** a fixed Combi Protect Rail 80mm high on the sides and in front.



**Option:** floor of aluminium profiles instead of plywood floor.




**Option:** an aluminium profil floor and light protection at the rear.



**Standard:** available in 4 sizes: 400 x 200 cm, 450 x 200 cm, 500 x 200 cm, and 500 x 220 cm (L x W).



**Standard:** available in 2700, 3000 or 3500 kg. Max. Gross Weight (3500 kg also as a 3-axle trailer).

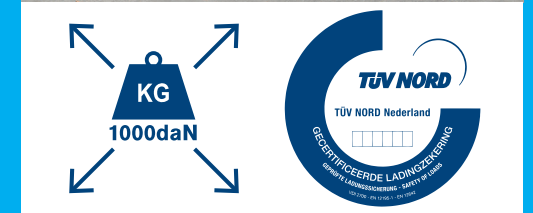

All HAPERT trailers have been provided with the TÜV certified load-securing system!



WWW.HAPERT.COM