








WHY SHOULD YOU HAVE A HAPERT INDIGO?

Your vehicles, tools and equipment are expensive and you will only recoup your investment if you are able to maximise their use. This is why it is vital for them to arrive at their destination both safely and quickly. Without any fuss and bother. That's why you

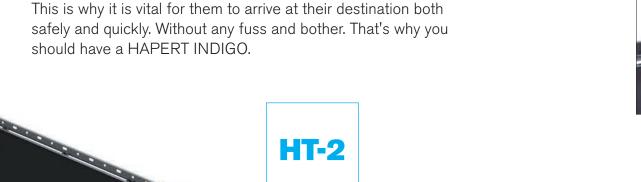

The binding bracket system integrated into the sides has a capacity of up to 1000 kg per



The load securing system is TÜV-certified. The LF model features four safety steps on the sides.



LF-2



YEAR CHASSIS WARRANTY

BUILT TO LAST.

It is vital for you to have absolute confidence in your trailer, particularly when your operating processes depend on it too. That's why we develop the very strongest and sturdiest trailers you will find anywhere in Europe. Our tried-and-tested welding technology solutions that have got what it takes to take on any job.



makes us unique and we supply transport



The extreme resilience of our trailers means they can be used day in, day out - a reliability you won't find anywhere else. This makes and keeps you mobile, at the lowest cost per kilometre. Whatever the challenge: BRING IT ON!



- Aluminium drive-on ramps under the trailer

- Ald mind in drive-of Paritys under the trailer
 A hinging Combi Protect Rail
 Aluminium dropsides 300 mm high
 Various floor options, such as:
 2 drive-on paths 600 mm wide with an oval hole
- an open, anti-slip grate surface aluminium profile floor

For the LF models:


- Aluminium profile floor instead of a plywood floor
 Excavator bucket support
 2 drive-on ramps 1500 mm long

- Parabolic suspensions incl. shock absorbers (3500 kg models)
- Tyres 185/70 R 13 C including black rims
 Removable aluminium dropsides, weldmesh sideextensions, ladderracks, covers etc.





- a double-acting hydraulic
- cylinder with a hand pump - an adjustable winch plus bracket
- a fixed Combi Protect Rail on the sides and front







The HT model is supplied as standard with a continuous drive-on ramp, 1000 mm high. The galvanised ramp features a gas spring system for ease of use and has an open grating profile with antislip effect. This continuous drive-on ramp is particularly suitable for transporting machines. For transporting cars, we recommend the option "2 loading skids in aluminium integrated under the floor".



The rear of the LF models has a drive-on ramp in one piece of approx. 1500 mm with brackets. Optionally available: two steel drive-on ramps. These ramps are width-adjustable. The ramps consist of an open anti-slip grating profile and are full-immersion galvanised.

All of the Indigo models have a fully-welded, hot-dip galvanised chassis. The LF model has

the added advantage of extra stringers. This model is fitted as standard with a multiplex floor

panel.



THE FULL HAPERT INDIGO RANGE

HT-2

Gross loading capacity
2700, 3000, 3500 kg
Dimensions (L x W x H)
405 x 200 x 8 cm
455 x 200 x 8 cm
505 x 200 x 8 cm

505 x 220 x 8 cm

HT-3

Gross loading capacity
3500 kg

Dimensions (L x W x H)
505 x 200 x 8 cm
505 x 220 x 8 cm

HF-2

Gross loading capacity
2700, 3000, 3500 kg
Dimensions (L x W x H)
405 x 200 x 8 cm
455 x 200 x 8 cm
505 x 200 x 8 cm
505 x 220 x 8 cm

HF-2 AUTO

Gross loading capacity
2700 kg
Dimensions (L x W x H)
405 x 200 x 8 cm

LF-1

Gross loading capacity
1350, 1500, 1800 kg
Dimensions (L x W x H)
310 x 144 x 23 cm
310 x 164 x 23 cm

LF-2

Gross loading capacity
3000, 3500 kg
Dimensions (L x W x H)
310 x 144 x 23 cm
310 x 164 x 23 cm
360 x 174 x 23 cm
410 x 164 x 23 cm
410 x 184 x 23 cm

LF-3

Gross loading capacity
3500 kg
Dimensions (L x W x H)
410 x 164 x 23 cm
410 x 184 x 23 cm





WWW.HAPERT.COM

THE FULL HAPERT PRODUCT RANGE:









