




SAPPHIRE H: THE IDEAL, HIGH-QUALITY CLOSED TRAILER

Thanks to the welded, hot-dipped galvanised substructure as well as the incredibly strong superstructure, the Sapphire H models are eminently suitable to transport your valuable cargo from A to B without any problem.

The closed trailers (up to and including 400 x 220 x 210 cm) have been provided with a plywood wall construction with a thickness of 15 mm, made from one piece. Models with a size larger than 405 x 200 x 210 cm are, as a standard, equipped with insulated panels with a thickness of 25 mm, made from one piece. Another appealing feature includes the super smooth ABS panels (max. 400 x 200 x 210 cm), allowing easy stickering of your trailer. Logos and advertising will look even more attractive!

The Sapphire H superstructure has, as a standard, been provided with 2 rear doors with stainless steel lock, stainless steel hinges, and stainless steel fasteners. Numerous other options and accessories are available as well, including a side door, a tail ramp, sliding or rolling hatches, and presentation hatches.

**BRING
IT ON.**

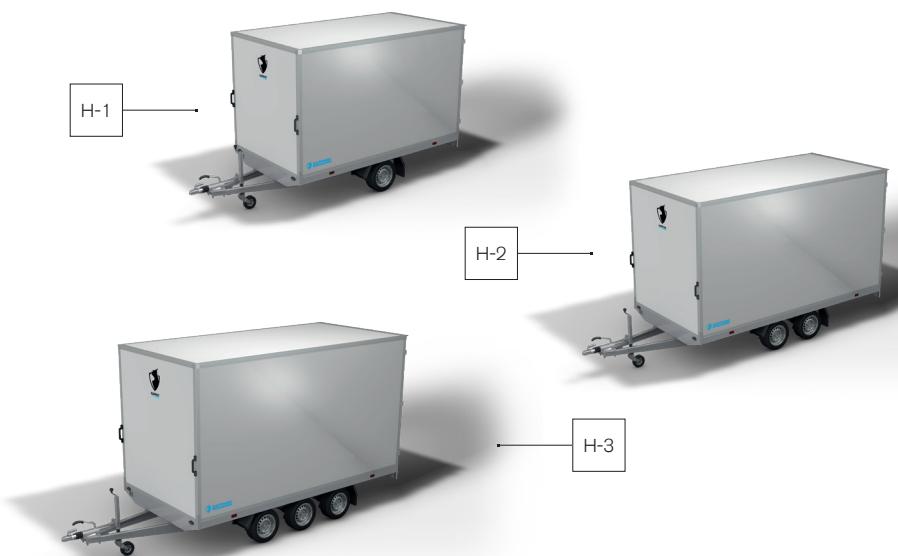

STANDARDS, OPTIONS, AND ACCESSORIES



SAPPHIRE

CLOSED TRAILERS




Option: double, large-sized, side doors.



Option: aluminium sliding hatch (max. dimensions: height 180 cm x width 150 cm) in the side wall.



Option: aluminium sliding hatch on the rear, and rear-light protection.



Standard: provided with TÜV-certified binding brackets with a capacity of 1000 daN.



Option: side door. As a standard, provided with stainless steel hinges and locks and stainless steel fasteners.



Option: side hatch with bottom part of the side wall fixed and 4 prop stands mounted.



Option: large-sized side hatch with centre post in place.



Option: side hatch and spoiler (made of polyester).



Option: tail ramp provided with grey antiskid coating. Ramp provided with gas springs.



Option: three-axle version with 2 side doors (front and rear) and spoiler.



Option: three-axle version with window and bevelled front (angle approx. 40 x 40 cm).



Option: LED-lights.



All Hapert trailers have been provided with the TÜV certified load-securing system!