

NEW



HAPERTRAILERS



BRING IT ON.

**THE ALL-NEW
HAPERTRAILERS INDIGO LF
MACHINE TRANSPORTER**

USING THE STRONGEST MACHINE TRANSPORTER.

The new Hapert Indigo LF is a completely new, lighter and lower machine transporter.

The new robust design of the Indigo LF combines the best qualities with great driving comfort! The height of the loading floor of the new Indigo LF is 34 cm. As a result, this multifunctional machine transporter has an approach angle of only 10° (with 200 cm ramps).

The new Indigo LF has a low unladen weight and therefore a high net loading capacity. There is also a choice of various floors that are tailored to each type of user.



10 YEAR CHASSIS WARRANTY

BRING IT ON.

SURPRISING STANDARD WITH...




Robust support legs



Step plate
At the back



TÜV certified load securing system

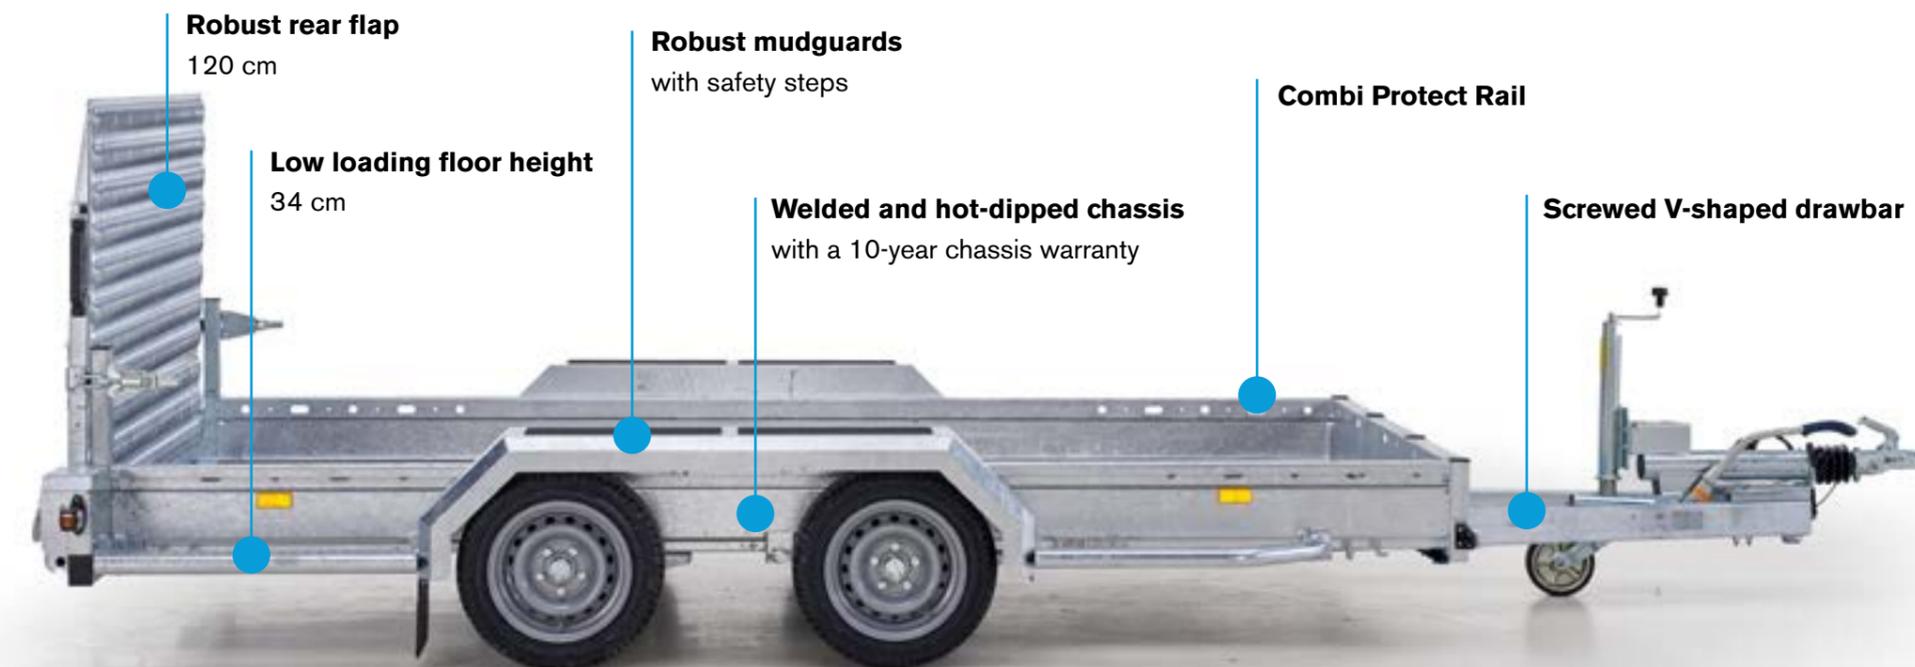

Robust rear flap
120 cm

Low loading floor height
34 cm


Robust mudguards
with safety steps

Welded and hot-dipped chassis
with a 10-year chassis warranty

Combi Protect Rail

Screwed V-shaped drawbar

EXTRA OPTIONS FOR YOUR POWERHOUSE

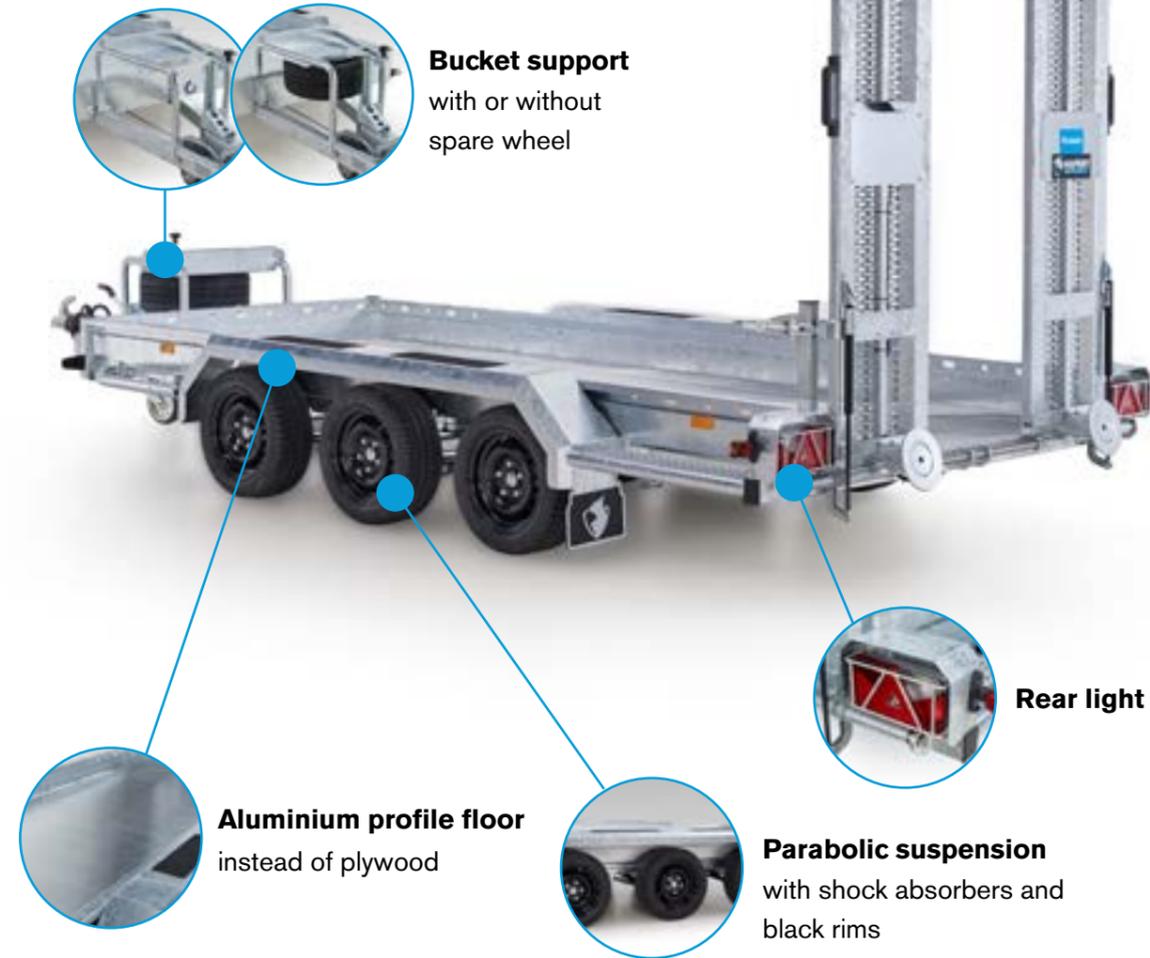

Bucket support
with or without spare wheel

2 drive-on ramps
200 cm



Shock absorbers



Winch with winch bracket.



LED lighting



Rear light cover



Aluminium profile floor
instead of plywood



Parabolic suspension
with shock absorbers and black rims



Rear flap 150 cm

Technical specifications of machine transporter

INDIGO LF-2

	305x139	305x159	355x169	405x159	405x179
Maximum Gross Weight (kg)	3000	3000	3000	3000	3000
Empty weight (kg)	700	740	764	805	835
Loading capacity (kg)	2300	2260	2236	2195	2165
Weight classes 3500 kg. empty weight (kg)	+ 20	+ 22	+23	+ 22	+ 24
Parabolic suspension incl. shock absorbers 3500kg. (kg)	+ 78	+ 82	+ 84	+ 82	+ 86
Aluminium profile floor (kg)	+ 3	+ 4	+ 6	+ 6	+ 7
Without tailramp from side to side (kg)	- 85	- 104	- 110	- 104	- 116
2 loading ramps 195 cm. high instead of tailramp (kg)	+ 35	+ 18	+ 11	+ 18	+ 12
Interior length (cm) [A]	304	304	354	404	404
Interior width (cm) [B]	139	159	169	169	179
Length drawbar (cm) [C]	156	156	156	156	156
Total length (cm) [D]	489	489	539	589	589
Total width (cm) [E]	198	218	228	218	238
Total height (cm) [F]	149	149	149	149	149
Height of the loading floor (cm) [G]	34	34	34	34	34
Height of the coupling (cm) [H]	42,5	42,5	42,5	42,5	42,5
Height of the sides [I]	19,5	19,5	19,5	19,5	19,5
Drive-angle: Tailramp 120/ 150, Loading ramps 200	16° / 13° 10°				
Drive-angle (with parabolic suspension): Tailramp 120/ 150, Loading ramps 200	20° / 16° 12°				
Tyre size	195/50R13C	195/50R13C	195/50R13C	195/50R13C	195/50R13C
Number of fixing points	10	10	10	10	10


INDIGO LF-3

	405x159	405x179
Maximum Gross Weight(kg)	3500	3500
Empty weight (kg)	890	924
Loading capacity (kg)	2610	2576
Weight classes 3500 kg. empty weight (kg)	+ 45	+ 48
Parabolic suspension incl. shock absorbers 3500kg. (kg)	+ 114	+ 116
Aluminium profile floor (kg)	+ 6	+ 7
Without tailramp from side to side (kg)	- 104	- 116
2 loading ramps 195 cm. high instead of tailramp (kg)	+ 18	+ 12
Interior length(cm) [A]	404	404
Interior width(cm) [B]	159	179
Length drawbar (cm) [C]	156	156
Total length (cm) [D]	589	589
Total width(cm) [E]	218	238
Total height (cm) [F]	149	149
Height of the loading floor (cm) [G]	34	34
Height of the coupling (cm) [H]	42,5	42,5
Height of the sides [I]	19,5	19,5
Drive-angle: Tailramp 120/ 150, Loading ramps 200	16° / 13° 10°	16° / 13° 10°
Drive-angle (with parabolic suspension): Tailramp 120/ 150, Loading ramps 200	20° / 16° 12°	20° / 16° 12°
Tyre size	195/50R13C	195/50R13C
Number of fixing points	10	10

Options/ weights

Support for bucket mini-excavator	+ 18 kg.
Winch with winch-support	+ 15 kg.

Dimensions and weights may vary subject to construction changes.

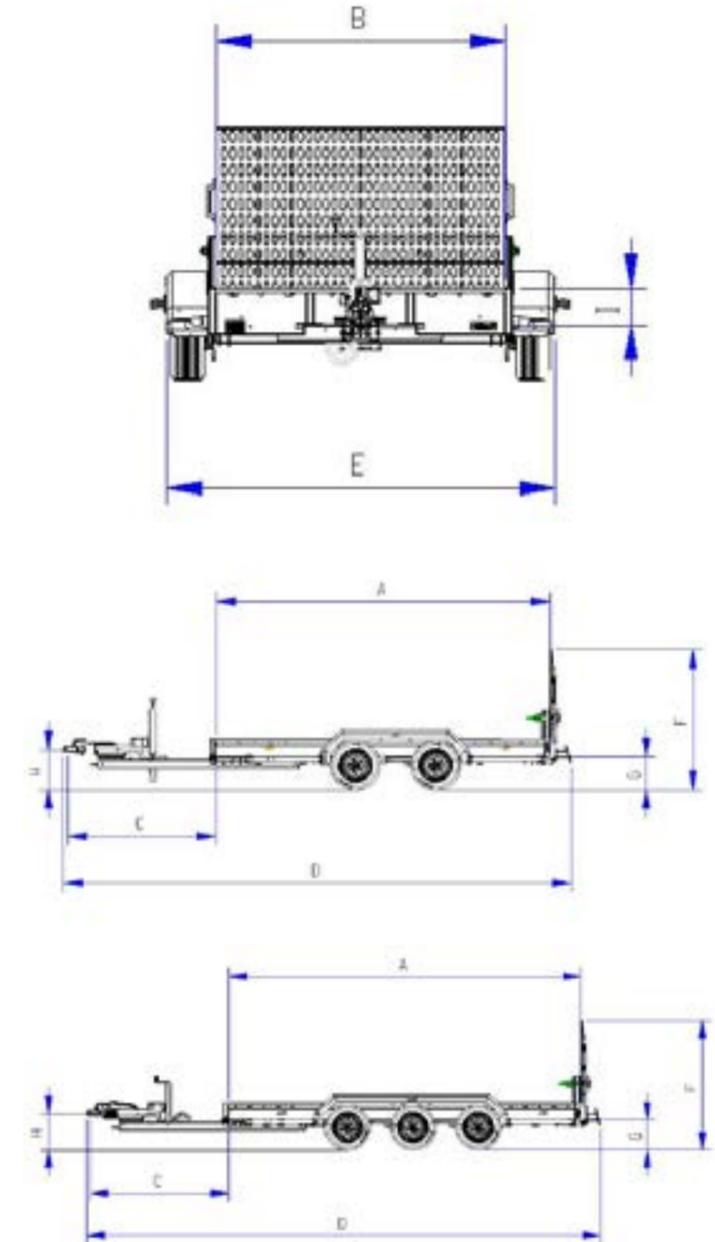

CURIOUS ABOUT MORE?

WWW.HAPERT.COM

All the information and illustrations in this brochure are based on the specifications of the trailer that were valid at the time the brochure went to press. The model range, technical specifications and options may be changed without prior notice. Please contact your Hapert dealer for the most up-to-date information. This brochure has been compiled with the greatest possible care and no liability can be accepted for any inaccuracies. We reserve the right to make changes.

