



AZURE L: THE PRACTICAL AND INNOVATIVE OPEN TRAILER

The Azure L has a low loading platform, allowing you to quickly and safely load and unload your cargo. As a standard, the model has been provided with high (37 cm) walls, allowing you to transport more volume.

As a standard, the Azure L has been provided with a durable Combi Protect Rail on the sides and front. The removable front rack is standard as well.

Where the side walls are concerned, these are available in different materials: plywood, aluminium, or galvanised steel. The choice is yours!

BRING IT ON.



STANDARDS, OPTIONS, AND ACCESSORIES



AZURE

OPEN TRAILERS



1
Standard: robust chassis, which is suitable for all single-axle versions up to and including 1800 kg Maximum Gross Weight.



2
Standard: fully welded and galvanized chassis, which is suitable for all double-axle versions up to 3500 kg Maximum Gross Weight



3
Standard: removable front rack.



4
Option: boltable hooks on the outside.



5
Option: wire-mesh rack with a height of 700 mm (removable) and a fine-mesh cargo net (mounted).



6
Option: removable aluminium walls with a height of approx. 40 cm, provided with durable locks.



7
Option: flat cover mounted (grey).



8
Option: raised cover mounted, different heights possible with prop stands including sliding clamp.



9
Option: raised cover mounted and spare wheel with support in front.



10
Option: sliding prop stands mounted with clamping bracket.



11
Option: adjustable, swivelling, telescoping prop stands and provided with removable crank.



12
Option: model L-1 'Chassis', available as braked and non-braked version.




13
Option: shock absorbers mounted on axles.



14
Option: load-restraint tubing mounted.



15
Option: model L-2 'Chassis', as an extra option, allows plywood floor plate, etc.

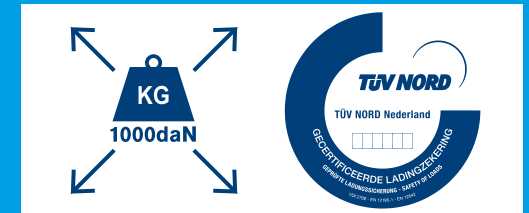

All Hapert trailers have been provided with the TÜV certified load-securing system!



WWW.HAPERT.COM